


NOTES:

1. DISTANCE OF .03' IS MEASURED FROM GUTTER F.L. TO F.L. OF 3" PIPE FOR CURB ONLY.
2. CONTRACTION JOINT TO BE ON CENTER OVER TOP OF PIPE.
3. IF EITHER PLAN 1 OR 2 APPLIES, THE SIDEWALK SHALL BE REMOVED AND RECONSTRUCTED. CONCRETE SHALL BE 520-C-2500. (1)

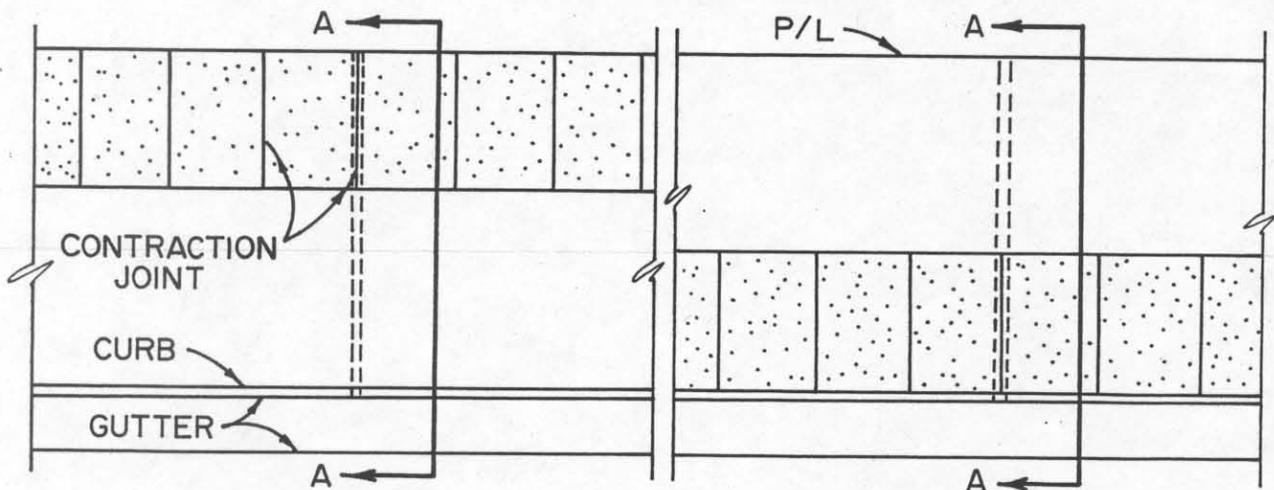

PLAN 1

PLAN 2

REV.	DATE	BY	CITY OF CAMARILLO ENGINEERING DIVISION		STANDARD CURB DRAIN	DRWG. NO.			
(1)	2/90	MS	DRAWN BY	RN		DATE	8/86		
(2)	5/90	MS	CHECKED BY			SCALE	N.T.S.		
			APPD. BY	<i>Daniel J. Bradley</i>		6-1-90			
			DIRECTOR OF ENGINEERING SERVICES			DATE			
						FILED			
						SHT		OF	