
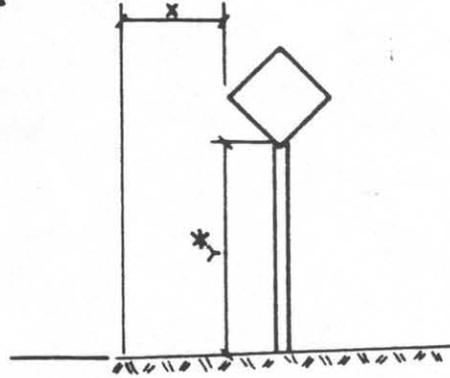


ALL SIGNS

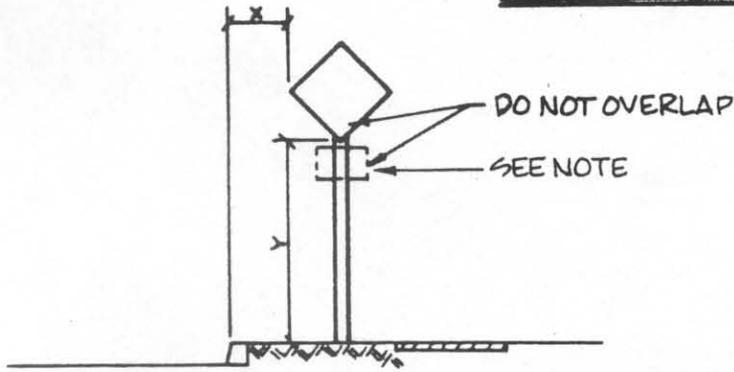

X = MINIMUM 2 FEET - MAXIMUM 4 FEET (1 FOOT WHEN SIDEWALK IS LESS THAN 5 FEET WIDE)

Y = MINIMUM 7 FEET - MAXIMUM 10 FEET (8 FEET WITH SUPPLEMENTAL SIGN, OR WHEN SIGNED AS BIKE ROUTE)



X = MINIMUM 6 FEET MAXIMUM 8 FEET

Y = MINIMUM 5 FEET * MAXIMUM 7 FEET

* IN PEDESTRIAN AREAS SUCH AS PARKS, YARDS, OR PATHS USE 7' MIN.

CHECK ADVANCED VISIBILITY PRIOR TO AND AFTER INSTALLATION

STOP OR YIELD SIGNS

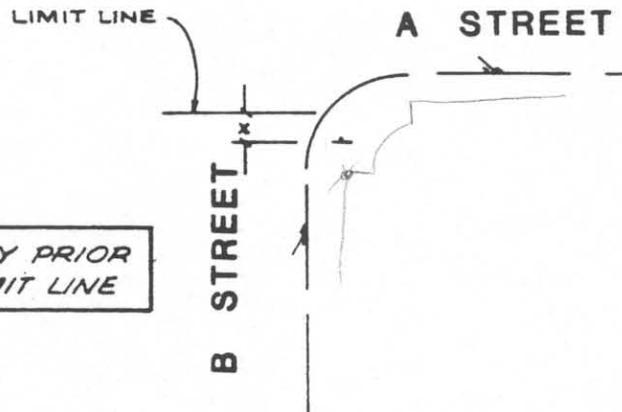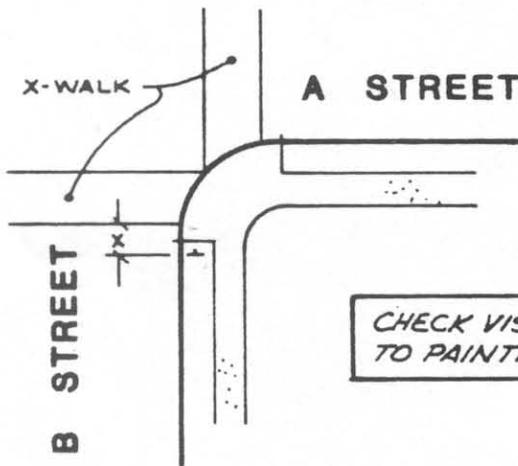

CHECK VISIBILITY PRIOR TO PAINTING LIMIT LINE

X = 4 FEET MINIMUM 50 FEET MAXIMUM

X = 4 FEET MINIMUM 50 FEET MAXIMUM

REV.	DATE	BY	CITY OF CAMARILLO ENGINEERING DIVISION	
1	10-87	J.L.	DRAWN BY	DATE
			CHECKED BY	SCALE none
			APPD. BY	DATE
			<i>David W. Snelton</i> 5/29/83 DIRECTOR OF ENGINEERING SERVICES	

TYPICAL SIGN INSTALLATION DETAIL

DRWG. NO. **TR-2**

FILED

SHT 1 OF 1