

**CITY OF CAMARILLO
WATER DIVISION**


**AMENDMENTS TO THE
STANDARD SPECIFICATIONS
REVISED JULY 2005**

- A. Provisions contained in this document amend the "City of Camarillo Water Division Standard Specifications" (CWDSS), 2005 edition.
- B. The provisions have been arranged in a format and sequence that parallels the CWDSS. For convenience, references to the page numbers of the amended sections and subsections in the CWDSS are provided. Since sections and subsections in the CWDSS may continue on multiple pages, the reference page numbers in this amendment indicate the page that the particular section or subsection begins and may not be the page that the amendment occurs.
- C. A vertical line in the left margin denotes a change in the CWDSS since adopted in July 2005 by the Board. This is done as a courtesy to the user of this document, but does not guarantee that all changes are denoted. The Water Division disclaims any responsibility or liability for any errors or omissions.


Review By:

 06/25/12

Richard Nack
Senior Civil Engineer

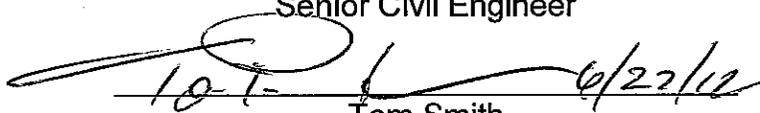 6/27/12

Tom Smith
Water Superintendent

 6/25/2012

Lucia McGovern
Deputy Director Public Works,
Environmental

Approved:



Naftalia Tucker, P.E.
City Engineer RCE No. 50878

The amendments herein apply to the "City of Camarillo Water Division Standard Specifications" (CWDSS) July 2005 edition.

The section and subsection enumeration is the same as the CWDSS.

- STANDARD SPECIFICATIONS -

Page 3

- W-19 Change Typical Remote Read Water Meter System Installation to NOT USED
- W-31 Change NOT USED to FIRE SPRINKLER SERVICE
- W-35 Change to Traffic Valve Box With Lid Marked "Water" or "Reclaimed Water," as appropriate.

Page 4

- C. Other Requirements
Add the following requirement after requirement #6 as follows:
 - 7. 2010 California Residential Code (Sec. R313)

Page 20

- 6. (b) (2) Pipe and fittings: Add the following at the end of this subsection: All brass shall be low-lead.

Page 23

- 9. (b) (2) Fire Hydrants shall be in accordance with City Drawing Nos. W-7 & W-8 with ABS plastic protector caps. Fire hydrant heads shall meet the requirements of AWWA Standard C503-05.

Page 36

- 4. (b) (2) Pipe and Fittings Add the following at the end of the first paragraph of this subsection: Polyethylene (PE) pipe may be used at locations approved by Water Division. PE pipe shall be minimum DR 17, manufactured by PolyPipe or approved equal.

- DRAWINGS -

W-7

Change "BRONZE CAP" to ABS PLASTIC PROTECTOR CAP.

W-8

Change NOTE: "METAL" CAPS to ABS PLASTIC PROTECTOR CAPS

W-11

Delete Note 3. ~~ALL COPPER PIPE SHALL BE COVERED WITH 6 MIL PLASTIC SLEEVING WITH ENDS SEALED WITH 10 MIL TAPE. PLASTIC SLEEVING~~

~~SHALL BE SPECIALTY PRODUCTS P-3016 OR APPROVED EQUAL.~~

W-11A

~~Delete Note 9. ALL COPPER PIPE SHALL BE COVERED WITH 6 MIL PLASTIC SLEEVING WITH ENDS SEALED WITH 10 MIL TAPE. PLASTIC SLEEVING SHALL BE SPECIALTY PRODUCTS P-3016 OR APPROVED EQUAL.~~

W-12

~~Delete Note 9. ALL COPPER PIPE SHALL BE COVERED WITH 6 MIL PLASTIC SLEEVING WITH ENDS SEALED WITH 10 MIL TAPE. PLASTIC SLEEVING SHALL BE SPECIALTY PRODUCTS P-3016 OR APPROVED EQUAL.~~

W-13

~~Delete Note 9. ALL COPPER PIPE SHALL BE COVERED WITH 6 MIL PLASTIC SLEEVING WITH ENDS SEALED WITH 10 MIL TAPE. PLASTIC SLEEVING SHALL BE SPECIALTY PRODUCTS P-3016 OR APPROVED EQUAL.~~

W-19

Delete Drawing. Information – NOT USED

W-20

~~Delete Note 8. ALL COPPER PIPE SHALL BE COVERED WITH 6 MIL PLASTIC SLEEVING WITH ENDS SEALED WITH 10 MIL TAPE. PLASTIC SLEEVING SHALL BE SPECIALTY PRODUCTS P-3016 FOR ¾" & 1" PIPE, AND P-3016 FOR 2" & 2-1/2" PIPE OR APPROVED EQUAL.~~

W-31

Add Fire Sprinkler Service Information to Drawing

W-35

Change "CHRISTY" to "J&R CONCRETE PRODUCTS No. V4-T" (SEE ATTACHMENT #1)

W-35

Insert after "TRAFFIC VALVE BOX WITH LID MARKED WATER" the following:
OR "RECLAIMED WATER".

W-35

Insert the following:



NOTE:

SEE WATER DIVISION STAFF FOR INSTALLATION REQUIREMENTS.


W-62

Add the following General Water Plan Note after Note #39 as follows:

40. WATER MAIN SEPARATION SHALL BE IN ACCORDANCE WITH TITLE 17 & 22 CALIFORNIA CODE OF REGULATIONS ARTICLE 64572.

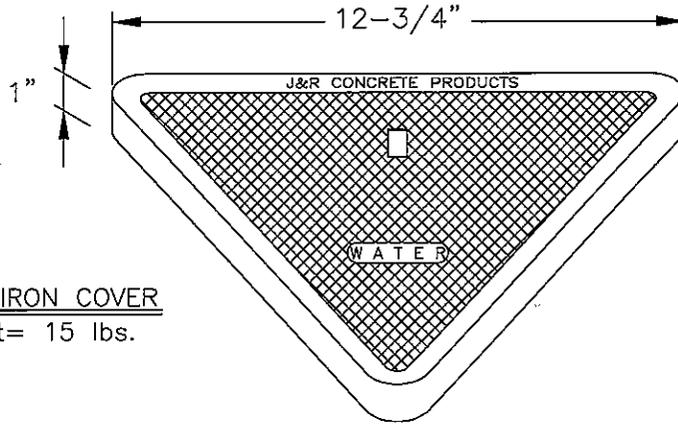

CAST IRON COVER
Weight= 15 lbs.

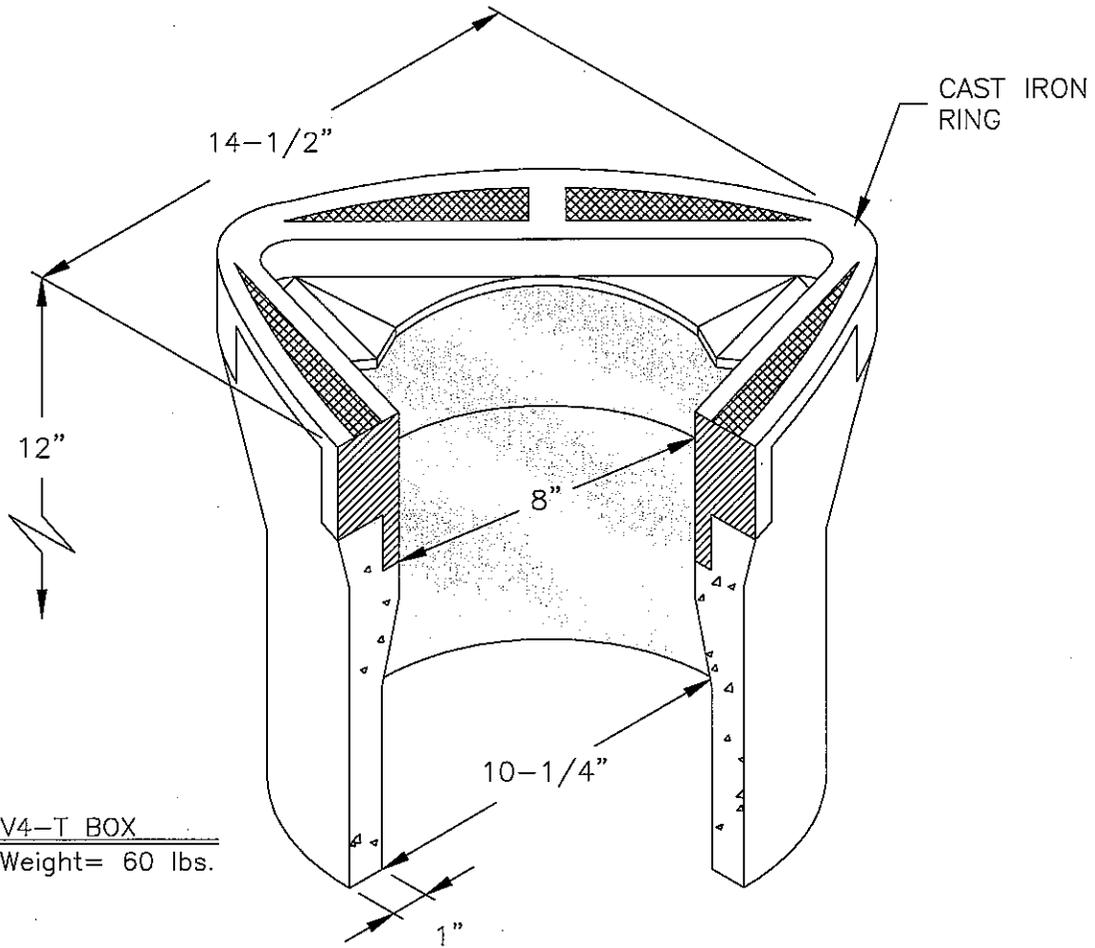

V4-T BOX
Weight= 60 lbs.

**No. V4-T
VALVE BOX SERIES
FOR H-10 LOADING**

J&R CONCRETE PRODUCTS

440 W. MARKHAM ST.
PERRIS, CA. 92571
PHONE:(951) 943-5855 FAX:(951) 940-9207